



JINN FA

CNC SWISS TURN MACHINE



JSL-51RBY




ISO 9001-2000

www.jinnfa.com


JSL-51RB/51RBY

TOOL SYSTEM LAYOUT


JSL-51RB

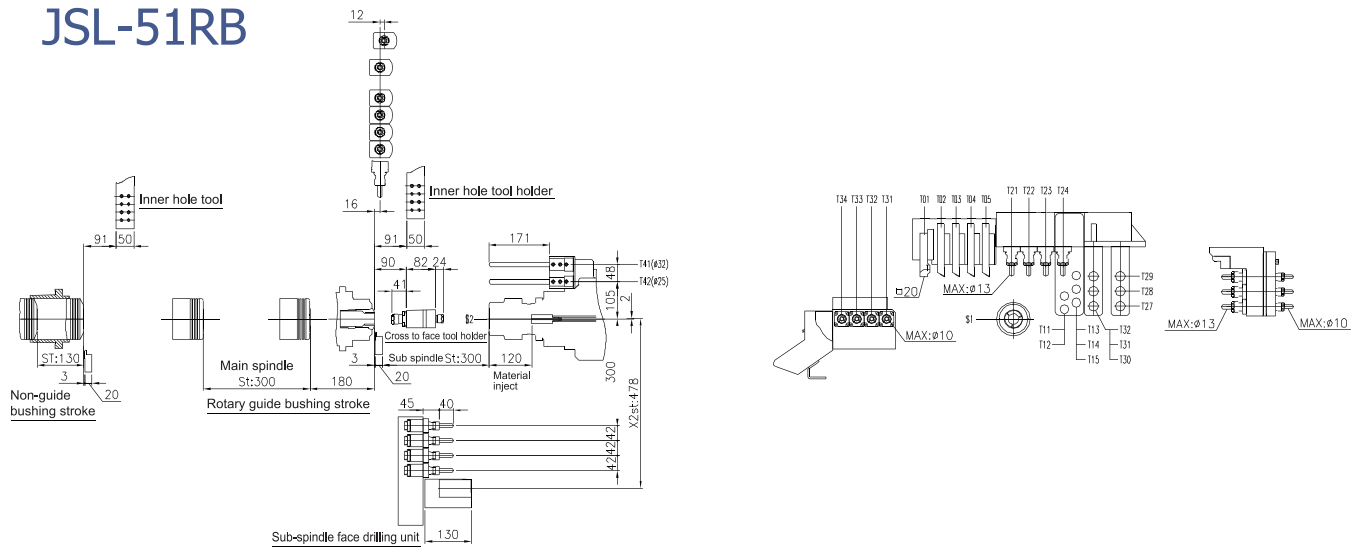

JSL-51RBY

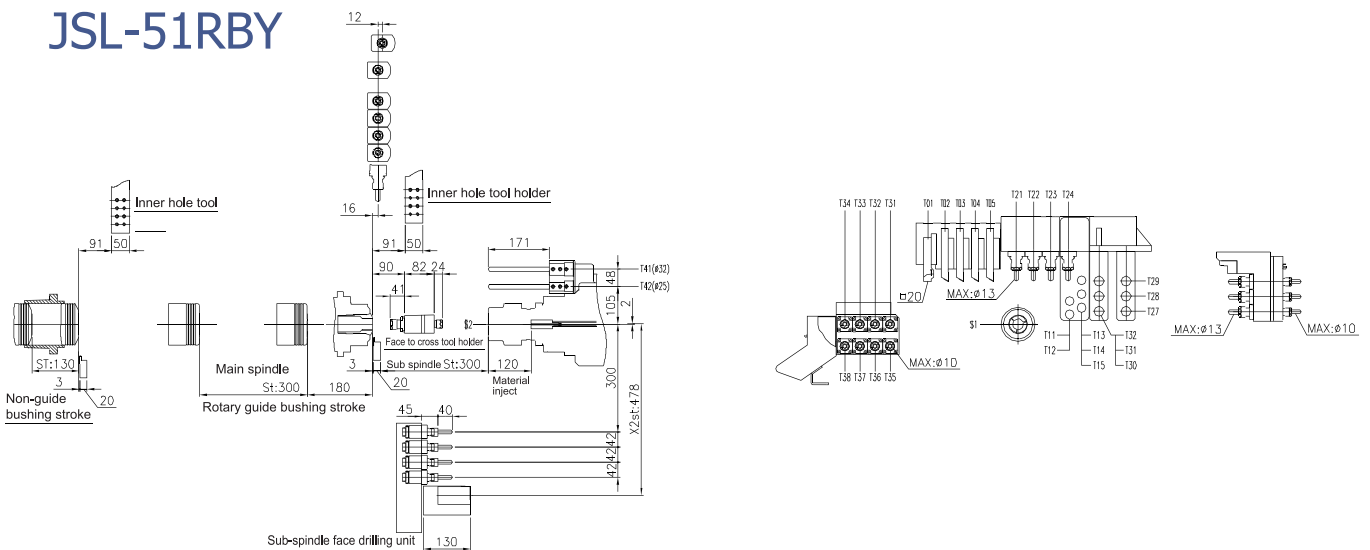

DIMENSION

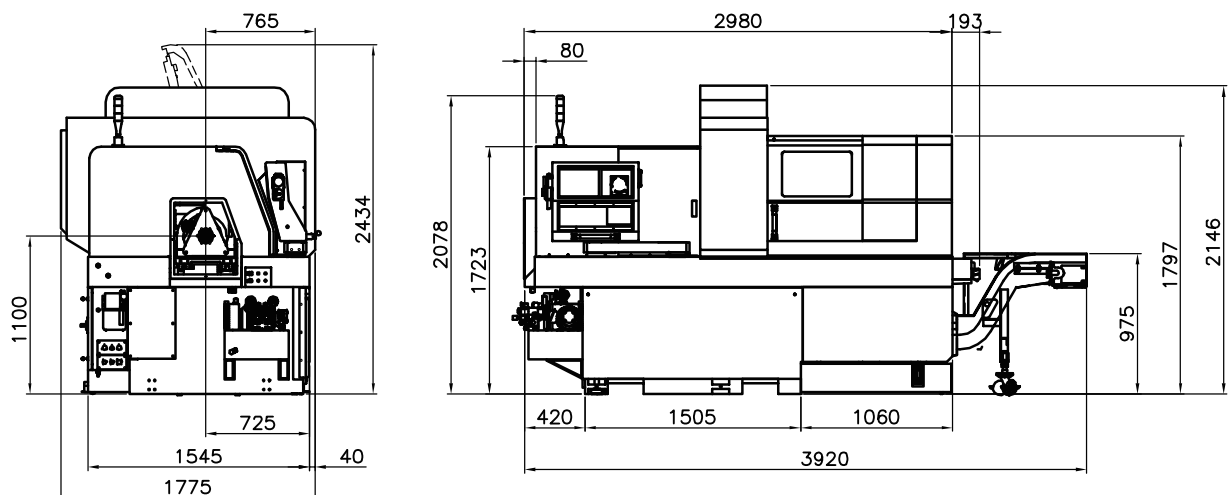

SPECIFICATION

ITEM	Unit	JSL-51RB	JSL-51RBY
Max. turning diameter of main spindle	mm	51	
Max. turning diameter of sub-spindle	mm	51	
Max. turning length (Rotary guide bushing)	mm	300	
Max. turning length (Non-guide bushing)	mm	130	
Max. turning length (Fixed bushing)	mm	non	
Max.drilling / tapping capacity of main spindle	mm	Ø26/M16	
Max.drilling / tapping capacity of sub-spindle	mm	Ø20/M12	
Max.cross drilling / tapping capacity	mm	Ø12/M10	
O.D tool holder	pcs	5/(□20mm)	
I.D tool holder	pcs	5 / Ø25mm	
S1 cross live tool holder	pcs	6 (ER-20)	
Sub-spindle face drilling tool	pcs	4	8
Controlled axes (incl. C-axis)	pcs	7	8
Main / sub-spindle bore	mm	Ø 52 / Ø 52	
Max. speed of main / sub-spindle	Rpm	4500 / 4500	
X1/Z1/Y1/X2/Z2/Y2 axis rapid traverse	m/min	24	
Max. speed of S1 cross drilling tool	Rpm	4000	
S1 cross tool motor	Kw	2.5	
S2 face tool motor	Kw	2.5	
Max. speed of S2 face drilling tool	Rpm	4000	
Main. spindle motor	Kw	11 / 15	
Sub-spindle motor	Kw	7.5 / 11	
Y1/X1/Z1/X2/Z2 axis motor	Kw	2.5	
Y2 axis motor	Kw	Non	2.5
Coolant pump motor	Kw	0.54	
Power requirement	KVA	30	
Lubrication oil capacity	L	2	
Coolant tank capacity	L	250(100%)	
Machine dimension (L*W*H)	Mm	3173 x 1695 x 2146	
Weight	KG	5450	5480

*Our company reserves the right to change the specifications without notice.

STANDARD ACCESSORIES

	JSL-51RB	JSL-51RBY		JSL-51RB	JSL-51RBY
External tool holder (5 tools)	○	○	Lubrication device	○	○
Inner tool holder (5 tools)	○	○	C-axis of sub-spindle	○	○
Cross drilling tool holder (6 tools)	○	○	Sub-spindle face drilling/milling tool holder (4 tools)	○	-
Parts catcher & conveyor	○	○	Sub-spindle face drilling/milling tool holder (8 tools)	-	○
Tools & tool box	○	○	Y2-axis	-	○
Working lamp	○	○	Sub-spindle fixed tool holder	2pcs	3pcs
Non-guide bushing holder	○	○	Sub-spindle power tool holder	2pcs	3pcs
Main/sub-spindle hydraulic rotary cylinder	○	○	Sub-spindle 3-position O.D tool holder	-	1pcs
C-axis of main spindle	○	○	Spindle collet	2pcs	2pcs
Coolant device	○	○	Operation manual	○	○
Coolant inspection (Electronic type)	○	○	NC control operation manual	○	○
Cut-off inspection	○	○	NC control maintenance manual	○	○

OPTIONAL ACCESSORIES

- ER16 M2 double side collet shank
- Simultaneously rotary guide bushing holder
- Long parts catcher (Sub-spindle)
- Chip conveyor & cart
- ER16 collet set
- ER20 collet set
- Cutting oil chiller
- Stationary drilling tool holder (Sub-spindle)
- Power drilling tool holder (Sub-spindle)
- Oil mist collector
- Power saw unit (Spindle cross drilling tool)
- Power saw unit (Sub-spindle face drilling tool)
- 3-position eccentric tool holder (Main & sub-spindle)
- 3-position angle drilling tool holder (Manual)
- 1-position O.D tool holder (Sub-spindle)
- Ø16 Shortened type I.D tool holder (Sub-spindle)
- Ø16 I.D tool holder (Sub-spindle)
- Sub-spindle extended I.D tool holder Ø16 1-2
- Extended tool holder Ø16 (With one Ø16 1-2 I.D tool holder)
- High pressure coolant system 15/50/100 bars (With sub-coolant tank)
- Hydraulic bar feeder